

Copenhagen LED gen2 / Copenhagen City LED gen2

BRS562 / BDS562 / BSS562 / BRS762 / BDS762 / BSS762



BXS562

led color	ledgine	LEDs	W +/-10%	kg	INRUSH CURRENT	Max.	Ta 25 °C	Ta 15 °C	led color	ledgine	LEDs	W +/-10%	kg	INRUSH CURRENT	Max.	Ta 25 °C	Ta 15 °C
740	LED46	40	27.5	7.9	46A/225µs	11	✓	✓	830	LED40	40	29.5	7.9	46A/250µs	11	✓	✓
740	LED48	40	28.5	7.9	46A/250µs	11	✓	✓	830	LED46	40	34	7.9	46A/250µs	11	✓	✓
740	LED56	40	33.5	7.9	46A/250µs	11	✓	✓	830	LED48	40	35.5	7.9	46A/250µs	11	✓	✓
740	LED58	40	34.5	7.9	46A/250µs	11	✓	✓	830	LED56	40	41	7.9	46A/250µs	11	✓	✓
740	LED64	40	38	7.9	46A/250µs	11	✓	✓	830	LED58	40	42.5	7.9	46A/250µs	11	✓	✓
740	LED70	40	41.5	7.9	46A/250µs	11	✓	✓	830	LED64	40	47	7.9	46A/250µs	11	✓	✓
740	LED75	40	44.5	7.9	46A/250µs	11	✓	✓	830	LED70	40	52	7.9	46A/250µs	11	✓	✓
740	LED80	40	47.5	7.9	46A/250µs	11	✓	✓	830	LED75	60	54	8.0	53A/300µs	11	✓	✓
740	LED88	40	53	7.9	46A/250µs	11	✓	✓	830	LED80	60	58	8.0	53A/300µs	11	✓	✓
740	LED93	60	54	8.0	53A/300µs	8	✓	✓	830	LED88	60	63	8.0	53A/300µs	11	✓	✓
740	LED96	60	56	8.0	53A/300µs	8	✓	✓	830	LED93	60	67	8.0	53A/300µs	8	✓	✓
740	LED100	60	58	8.0	53A/300µs	8	✓	✓	830	LED96	60	70	8.0	53A/300µs	8	✓	✓
740	LED104	60	60	8.0	53A/300µs	8	✓	✓	830	LED100	2x40	71	8.1	53A/300µs	8	✓	✓
740	LED110	60	64	8.0	53A/300µs	8	✓	✓	830	LED104	2x40	74	8.1	53A/300µs	8	✓	✓
740	LED116	60	68	8.0	53A/300µs	8	✓	✓	830	LED110	2x40	78	8.1	53A/300µs	8	✓	✓
740	LED120	60	70	8.0	53A/300µs	8	✓	✓	830	LED116	2x40	82	8.1	53A/300µs	8	✓	✓
740	LED125	60	74	8.0	53A/300µs	8	✓	✓	830	LED120	2x40	85	8.1	53A/300µs	8	✓	✓
740	LED130	60	77	8.0	53A/300µs	8	✓	✓	830	LED125	2x40	89	8.1	53A/300µs	8	✓	✓
740	LED135	2x40	77	8.1	53A/300µs	8	✓	✓	830	LED130	2x40	93	8.1	53A/300µs	8	✓	✓
740	LED140	2x40	80	8.1	53A/300µs	8	✓	✓	830	LED135	2x40	97	8.1	53A/300µs	8	✓	✓
740	LED145	2x40	83	8.1	53A/300µs	8	✓	✓	830	LED140	2x40	100	8.1	53A/300µs	8	✓	✓
740	LED150	2x40	86	8.1	53A/300µs	8	✓	✓	830	LED145	2x40	104	8.1	53A/300µs	8	✓	✓
740	LED160	2x40	92	8.1	53A/300µs	8	✓	✓	830	LED150	2x40	108	8.1	53A/300µs	8	✓	✓
740	LED170	2x40	99	8.1	53A/300µs	8	✓	✓	830	LED160	2x40	116	8.1	53A/300µs	8	✓	✓
740	LED180	2x40	104	8.1	53A/300µs	8	✓	✓	830	LED170	2x40	126	8.1	53A/300µs	8	✓	✓
740	LED190	2x40	112	8.1	53A/300µs	8	✓	✓	830	LED180	2x40	134	8.1	53A/300µs	8	✓	✓
740	LED200	2x40	118	8.1	53A/300µs	8	✓	✓	830	LED190	2x40	142	8.1	53A/300µs	8	✓	✓
									830	LED200	2x40	152	8.1	53A/300µs	8	✓	✓


*Maxi number of luminaire on MCB 16A type B


BXS762



led color	ledgine	LEDs	W +/-10%	kg	INRUSH CURRENT	Max.	Ta 25 °C	Ta 15 °C	led color	ledgine	LEDs	W +/-10%	kg	INRUSH CURRENT	Max.	Ta 25 °C	Ta 15 °C
740	LED50	40	32.5	8.0	46A/250µs	11	✓	✓	830	LED40	40	31	8.0	46A/250µs	11	✓	✓
740	LED60	40	39	8.0	46A/250µs	11	✓	✓	830	LED50	40	39	8.0	46A/250µs	11	✓	✓
740	LED70	40	45.5	8.0	46A/250µs	11	✓	✓	830	LED60	40	46.5	8.0	46A/250µs	11	✓	✓
740	LED80	64	51	8.0	53A/300µs	8	✓	✓	830	LED70	40	55	8.0	46A/250µs	11	✓	✓
740	LED90	64	57	8.0	53A/300µs	8	✓	✓	830	LED80	64	61	8.0	53A/300µs	8	✓	✓
740	LED100	64	63	8.0	53A/300µs	8	✓	✓	830	LED90	64	68	8.0	53A/300µs	8	✓	✓
740	LED110	64	70	8.0	53A/300µs	8	✓	✓	830	LED100	64	77	8.0	53A/300µs	8	✓	✓
740	LED120	64	77	8.0	53A/300µs	8	✓	✓	830	LED110	64	85	8.0	53A/300µs	8	✓	✓
740	LED130	64	84	8.0	53A/300µs	8	✓	✓	830	LED120	64	94	8.0	53A/300µs	8	✓	✓
740	LED140	64	91	8.0	53A/300µs	8	✓	✓	830	LED130	64	102	8.0	53A/300µs	8	✓	✓
									830	LED140	64	112	8.0	53A/300µs	8	✓	✓

*Maxi number of luminaire on MCB 16A type B


Copenhagen LED gen2 BRS562
Copenhagen City LED gen2 BRS762 / Side entry Ø 48 mm

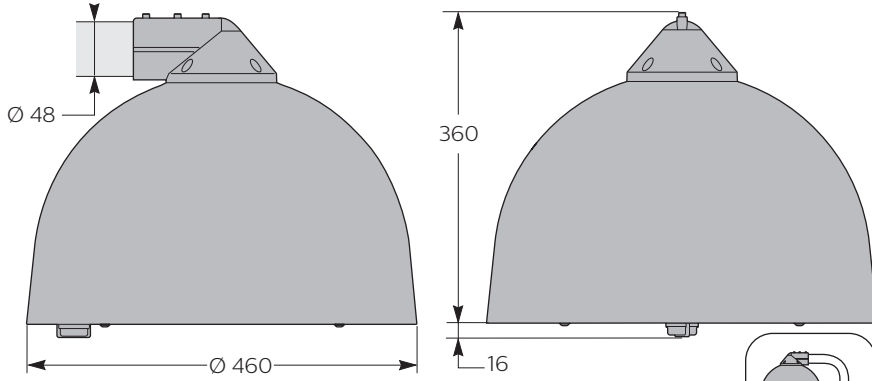


 **Copenhagen gen2 BRS562 / BRS762**
Side entry Ø 48 mm / Ø 60 mm

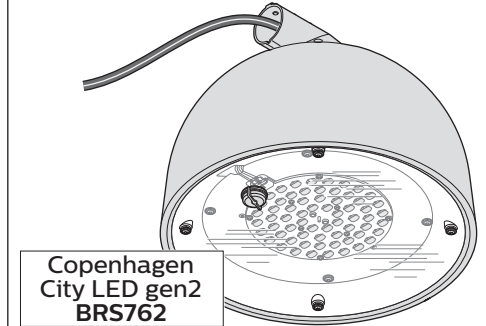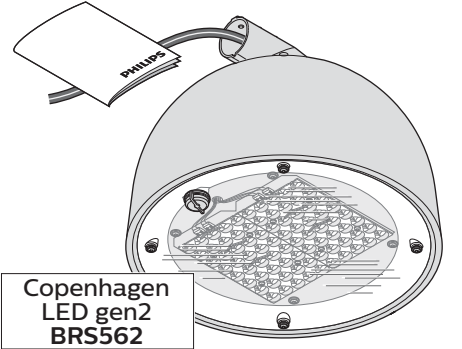

Copenhagen LED gen2 BRS562
Copenhagen City LED gen2 BRS762 / Side entry Ø 60 mm

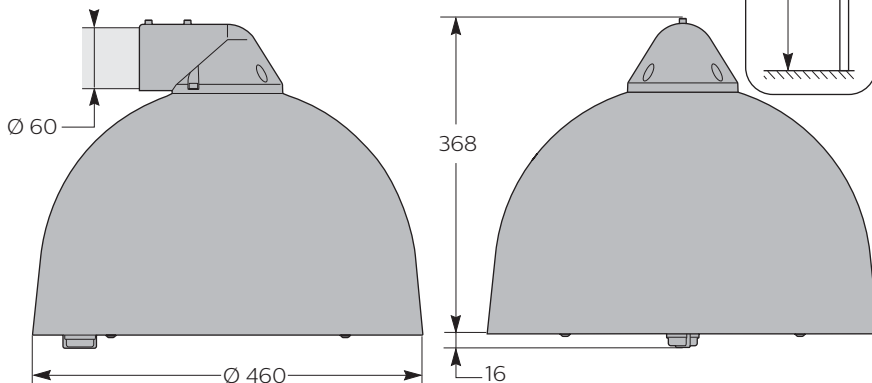


Copenhagen gen2 BSS562 / BSS762
Suspended / Wire


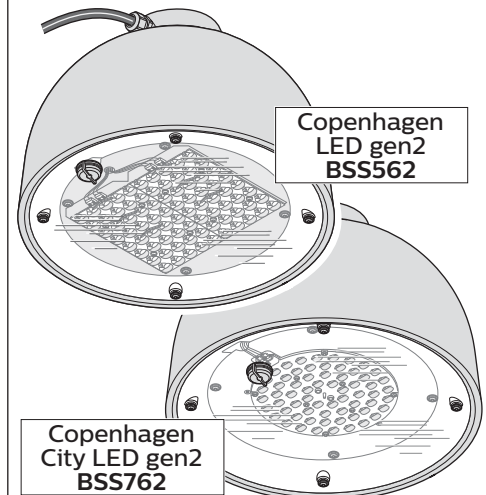






Copenhagen LED gen2 BDS562
Copenhagen City LED gen2 BDS762 - Center 3/4" thread

Copenhagen LED gen2 BSS562
Copenhagen City LED gen2 BSS762 - Suspended / Wire




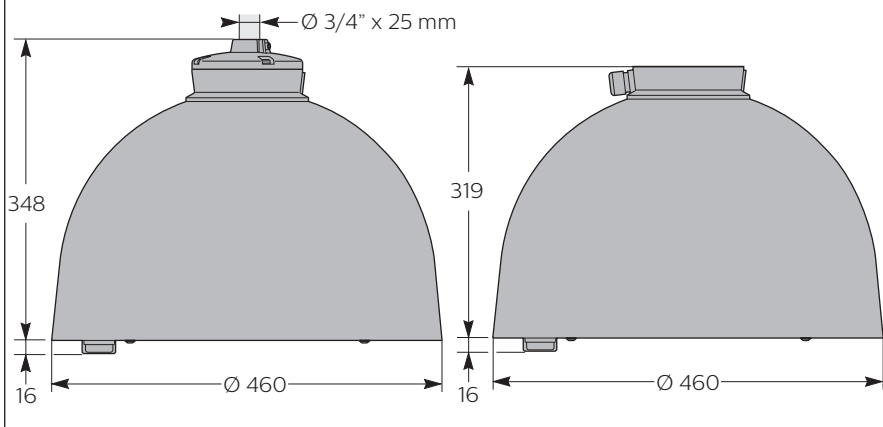


Copenhagen gen2 BDS562 / BDS762
Center 3/4" thread

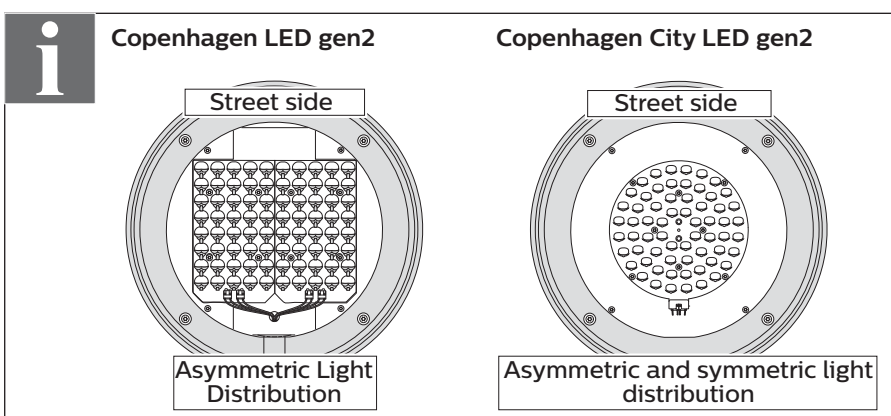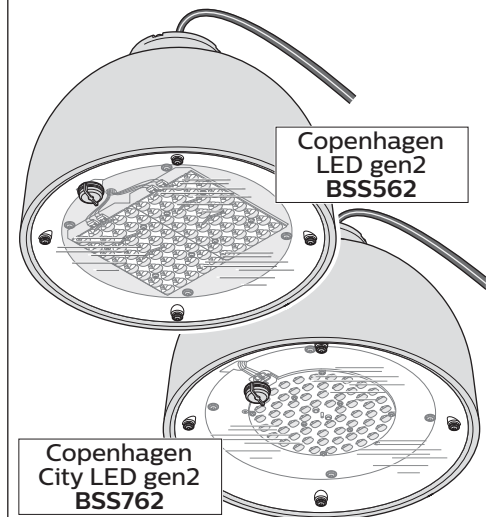

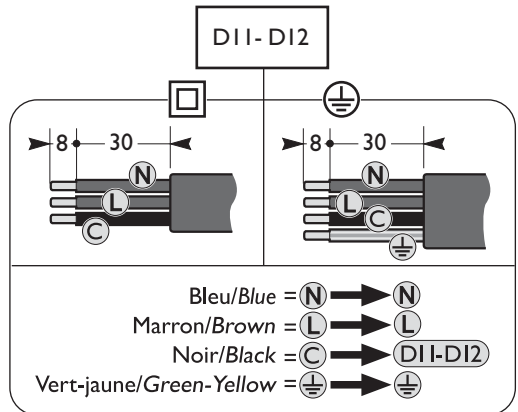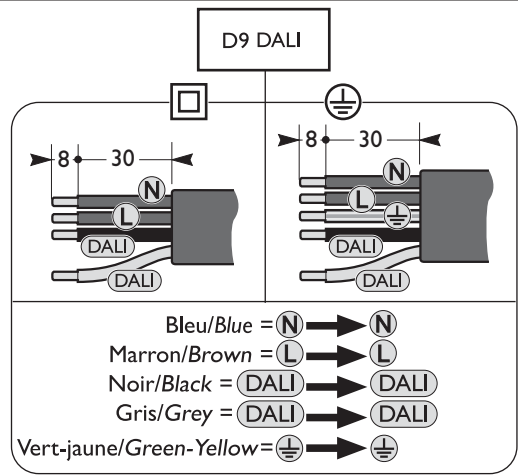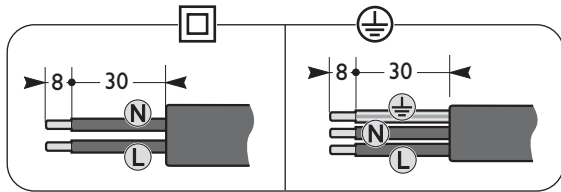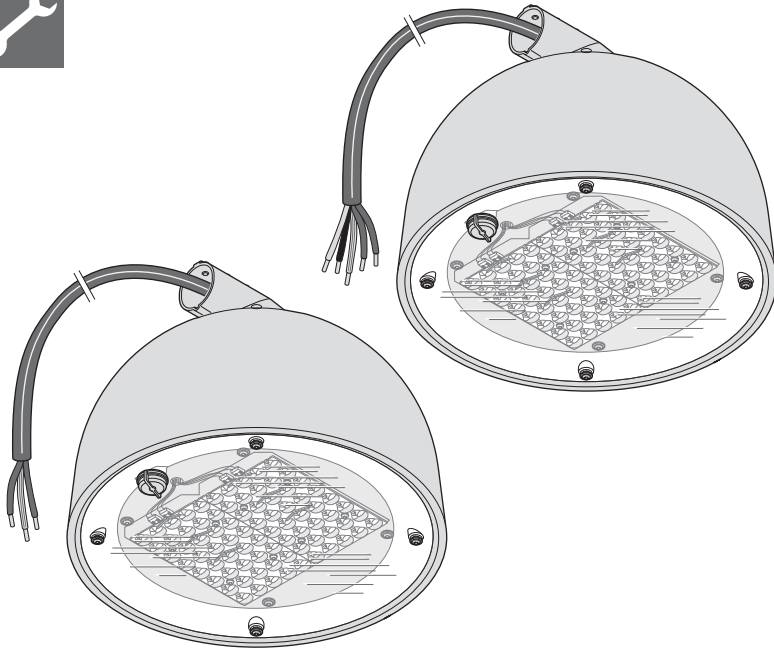


Copenhagen LED gen2 BRS562
Copenhagen City LED gen2 BRS762
Side entry Ø 48 mm

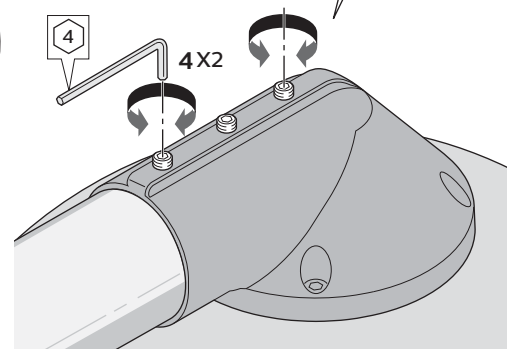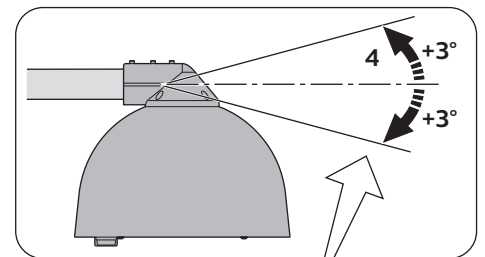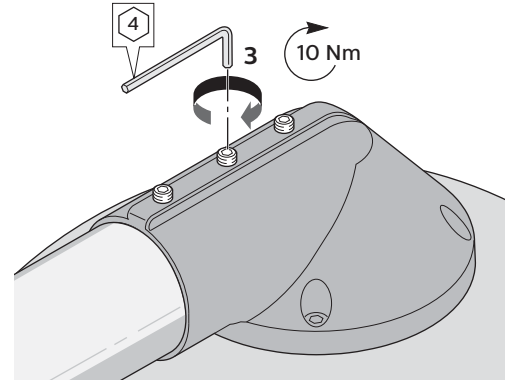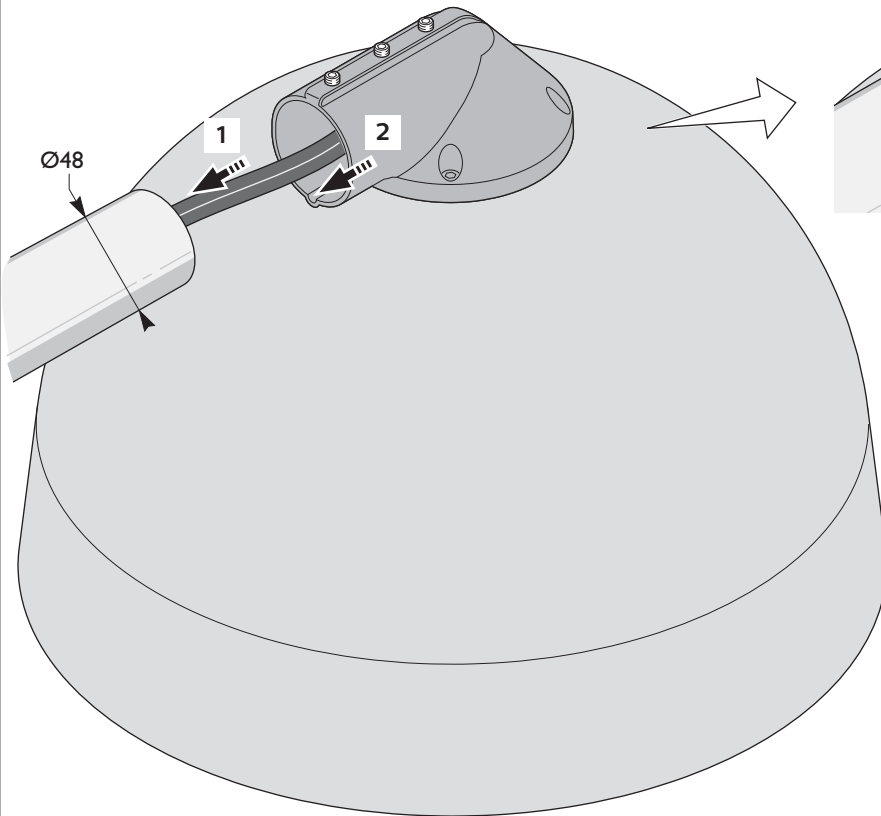


2a

Copenhagen LED gen2 BRS562
 Copenhagen City LED gen2 BRS762
 Side entry Ø 60 mm

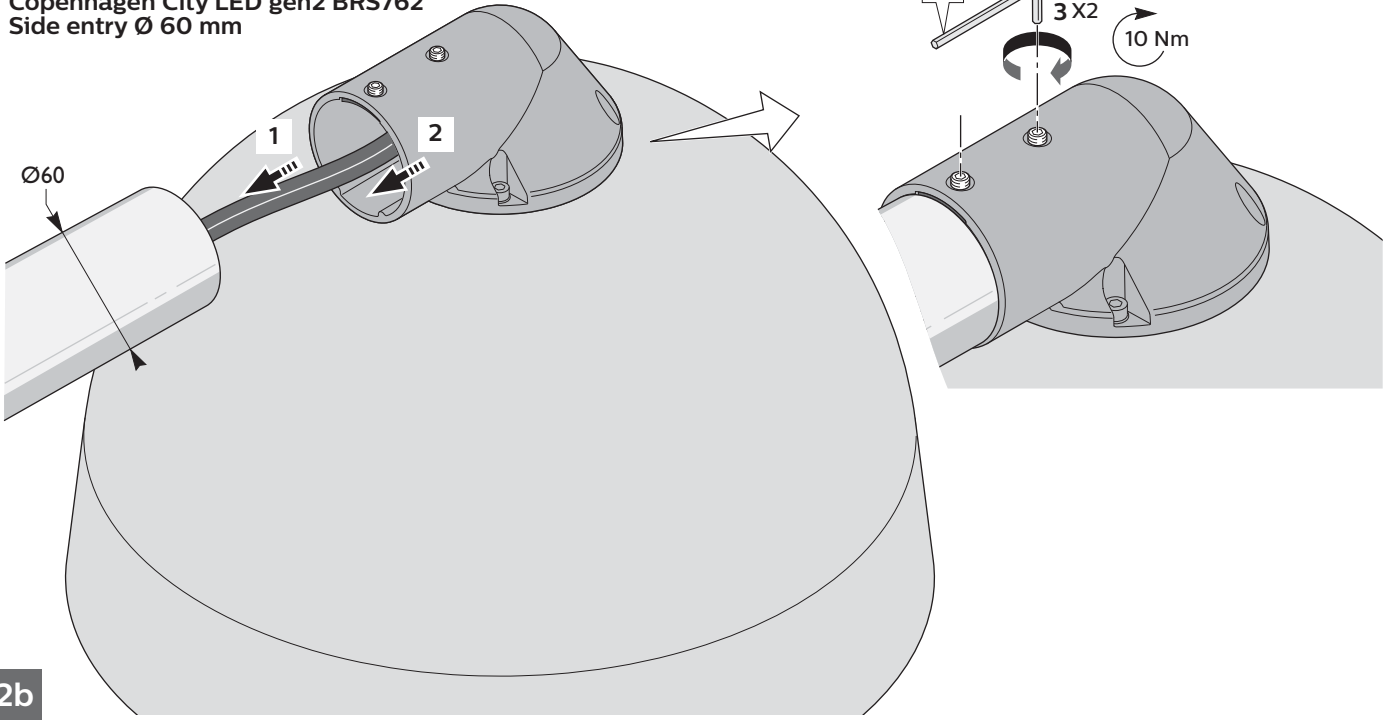




2b

Copenhagen LED gen2 BDS562
 Copenhagen City LED gen2 BDS762
 Center 3/4" thread

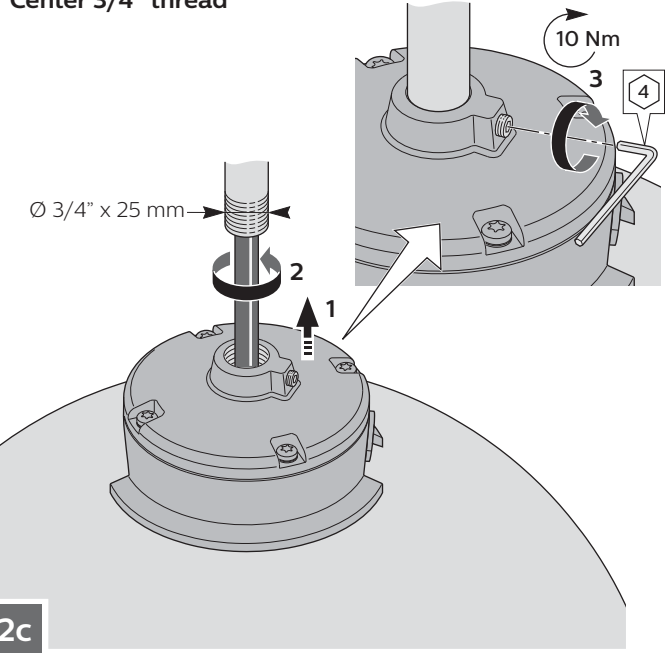


2c

Copenhagen LED gen2 BSS562
 Copenhagen City LED gen2 BSS762
 Suspended / Wire

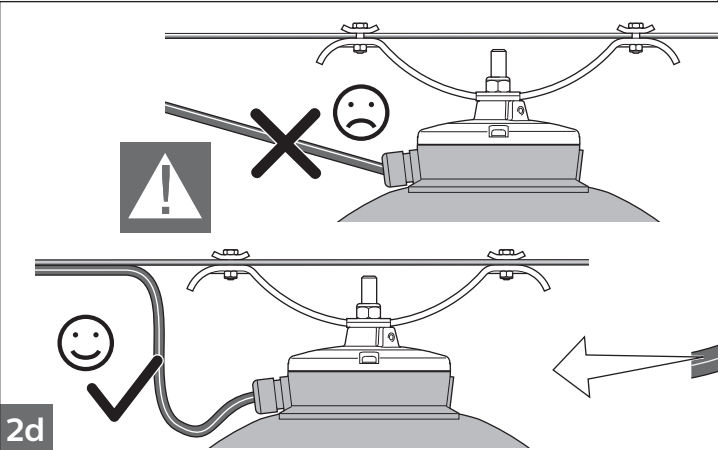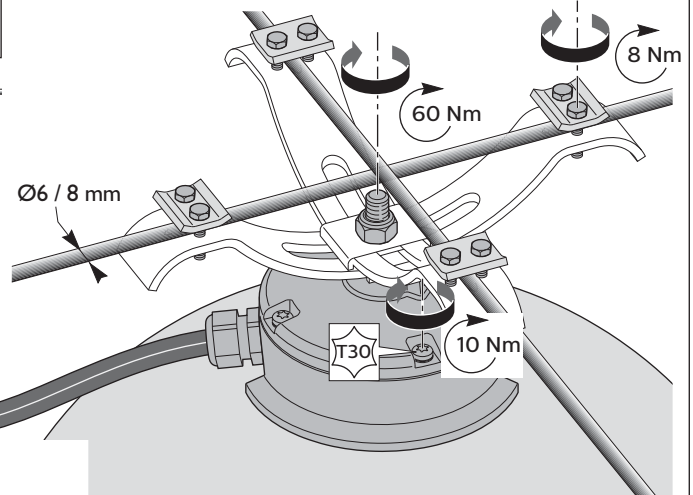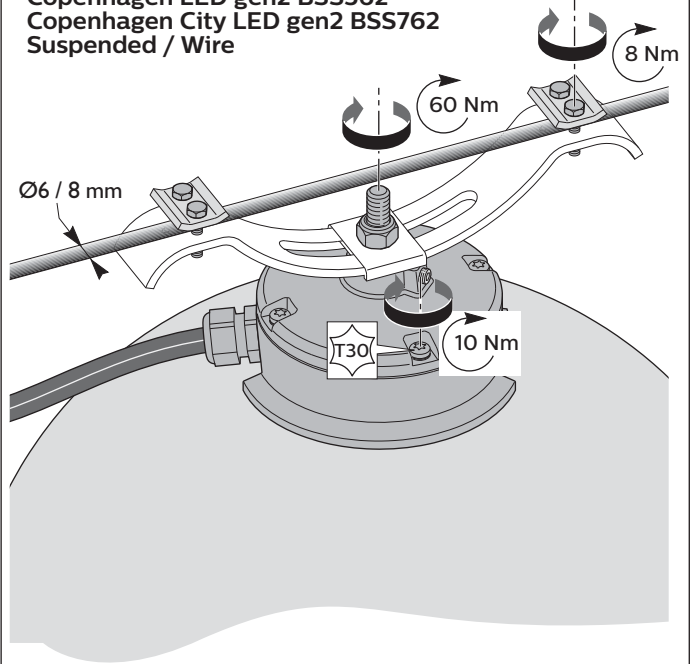


2d


LUMISTEP

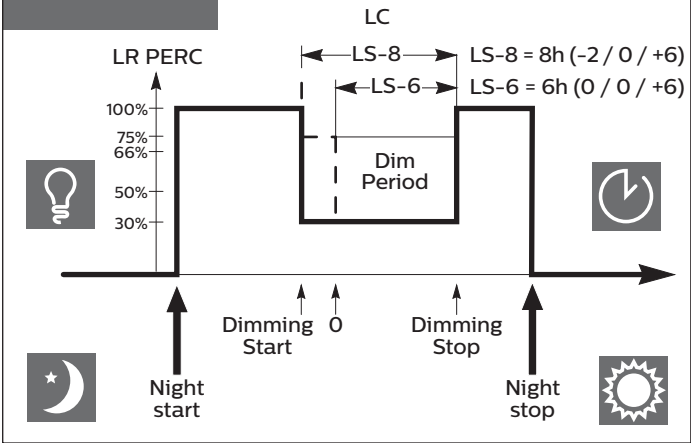


DYNADIMMER

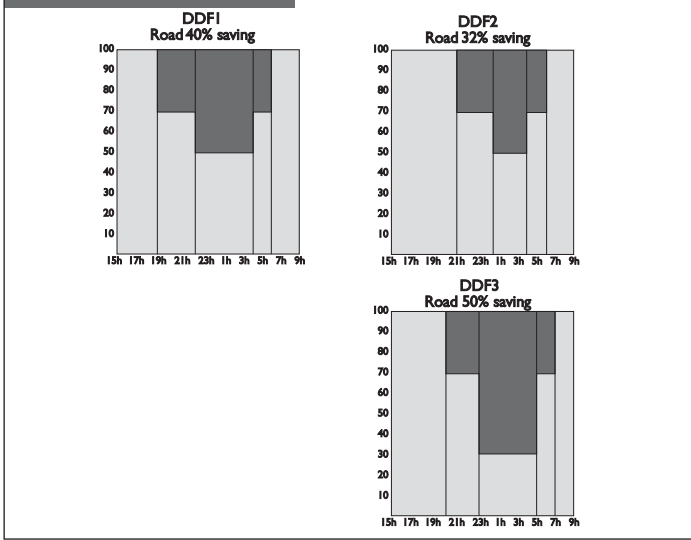


RF/CTC

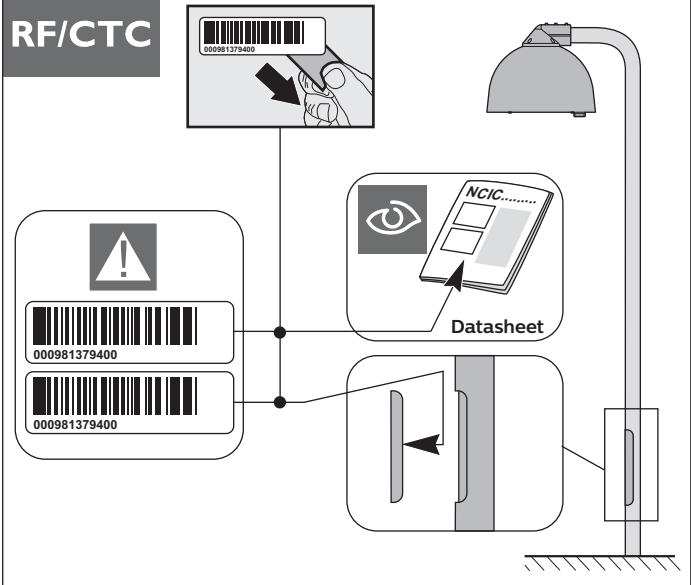







D9 DALI

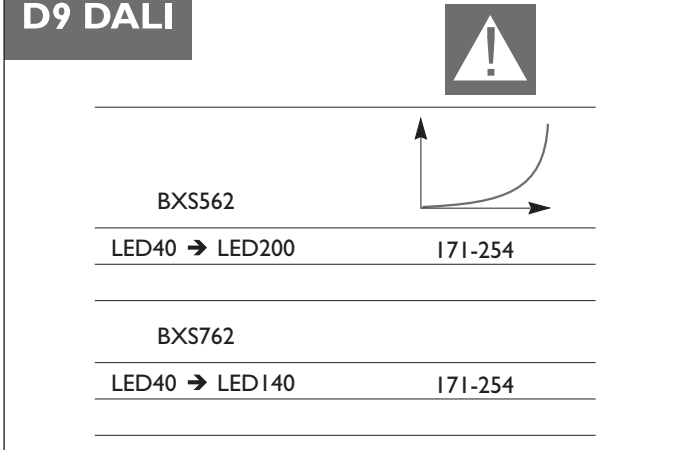


SR

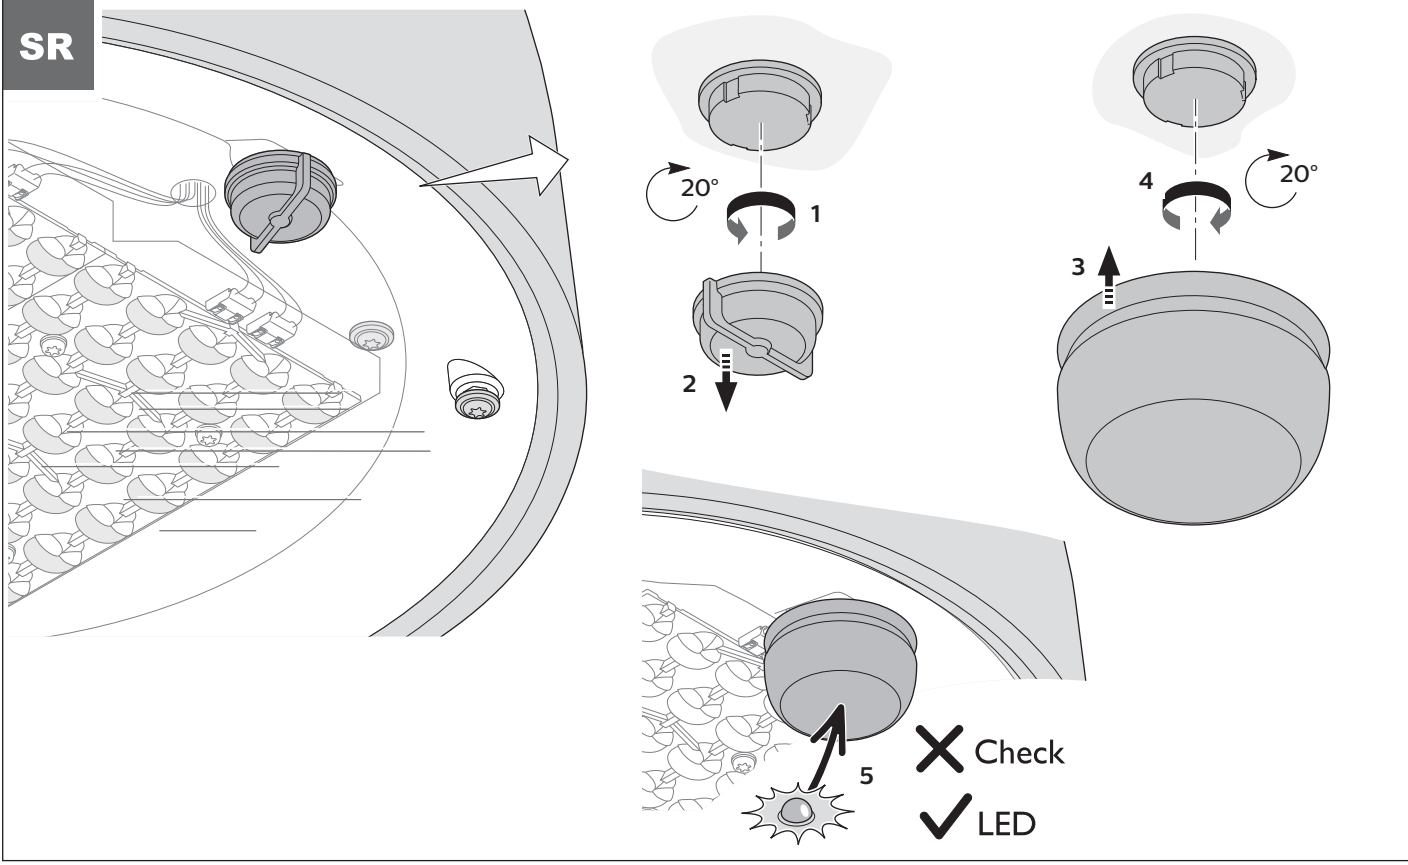

Service tag

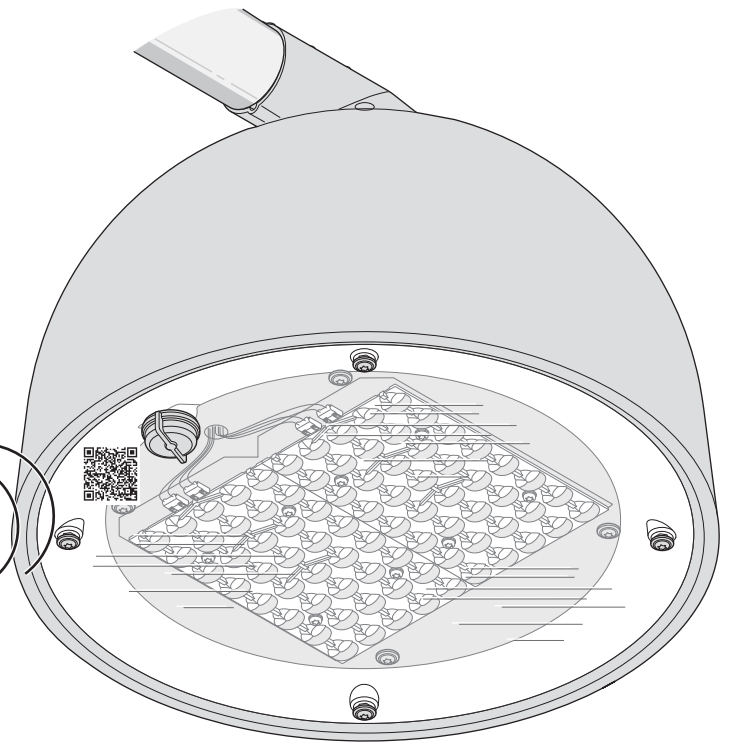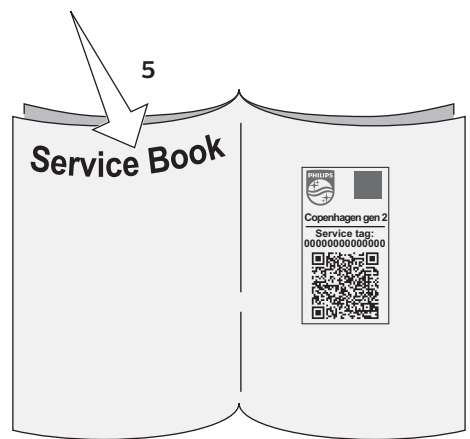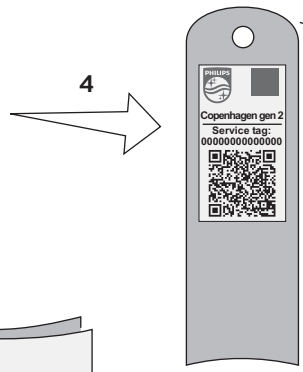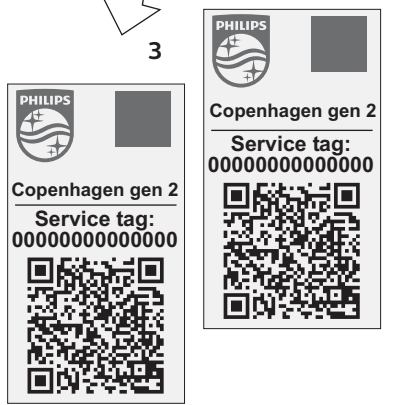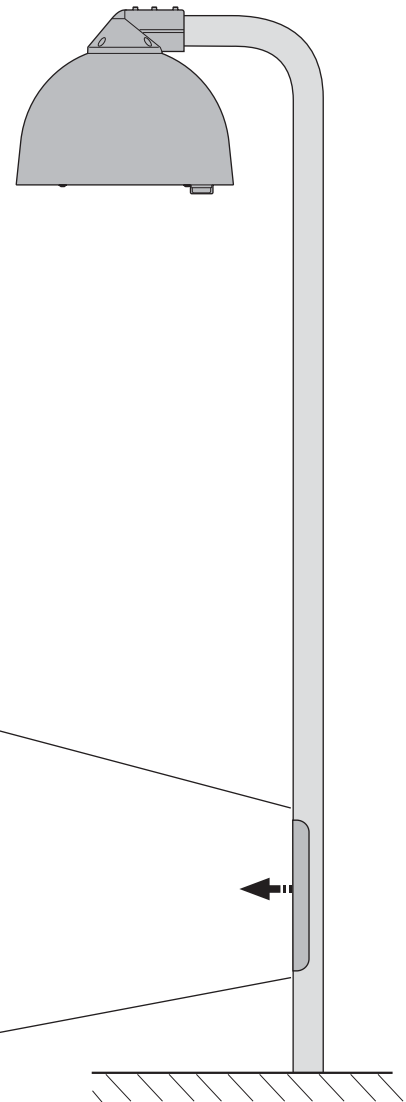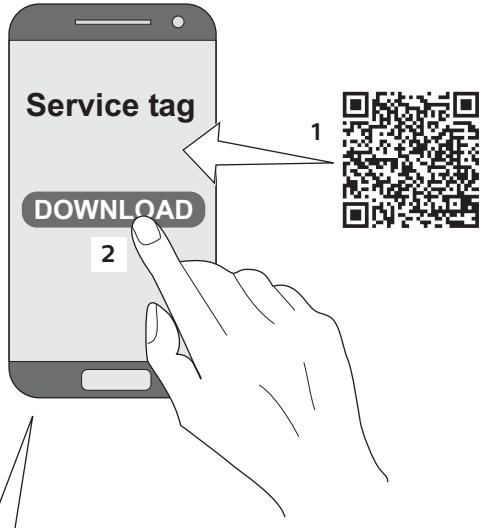

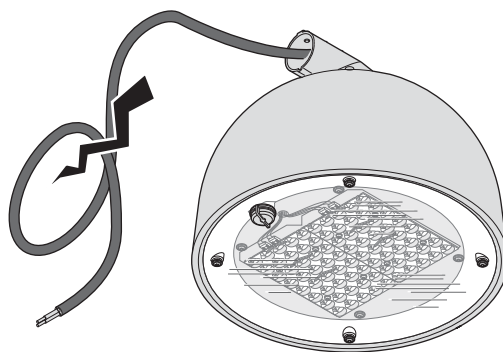

GB

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

FR

Si le câble ou le cordon extérieur souple de ce luminaire est endommagé, il doit être remplacé exclusivement par le fabricant ou son agent de maintenance ou toute personne de qualification équivalente, cela afin d'éviter tout risque.

DK

Hvis det udvendige, fleksible kabel eller ledning fra belysningsarmaturet beskadiges, må det udelukkende udskiftes af producenten, producentens serviceafdeling eller en lignende kvalificeret person for at undgå fare.

NO

Hvis armaturets utvendige fleksible kabel eller ledning blir skadet, skal det – for å unngå risiko – bare skiftes av produsenten, produsentens serviceavdeling eller lignende kvalifisert person.

SE

Om armaturens externa kabel är skadad, skall den enbart ersättas av tillverkaren, hans servicetekniker eller annan kvalificerad person för att undvika fara.



© 2019 Signify Holding.

All rights reserved. This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.